


ENVIRONMENTAL PRODUCT DECLARATION (EPD)

CommScope® - TENIO™ Splice and Patch Trays

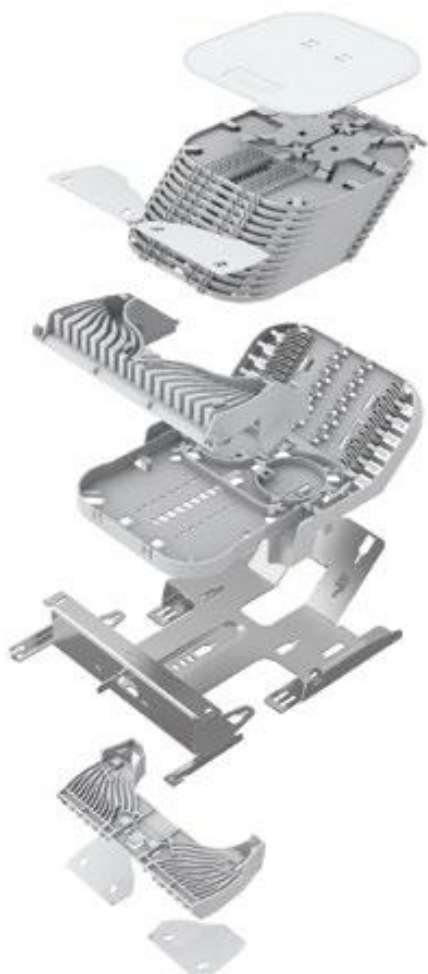

At CommScope, we believe that corporate responsibility and sustainability means making decisions that have a positive impact on our people, planet and bottom line.

CommScope's leaders have adopted a philosophy on corporate responsibility that embraces our core company values and holds us accountable to produce smart solutions that respect our people and our planet:

Meaningful integrity is a decisive personal and company-wide commitment to enable faster, smarter and more sustainable solutions while demonstrating the utmost respect for our human and natural resources.

This philosophy finds form in three pillars:

- Environmental
- Social
- Governance

Our commitment enables us to invest wisely in our future. By utilizing innovative technology, intelligent engineering and energy-efficient designs, we're building sustainable networks that make our customers more agile while also preserving the natural ecosystems from which we source our raw materials.

Environmental Product Declaration (EPD)


CommScope® Product
TENIO™- Splice/Patch Trays

COMMSCOPE®
an Amphenol company



According to
ISO 14025,
EN 15804 + A2

This declaration is an environmental product declaration (EPD) in accordance with ISO 14025, EN 15804 + A2. EPDs rely on Life Cycle Assessment (LCA) to provide information on a number of environmental impacts of products over their life cycle. Exclusions: EPDs do not indicate that any environmental or social performance benchmarks are met, and there may be impacts that they do not encompass. LCAs do not typically address the site-specific environmental impacts of raw material extraction, nor are they meant to assess human health toxicity. EPDs can complement but cannot replace tools and certifications that are designed to address these impacts and/or set performance thresholds – e.g. Type 1 certifications, health assessments and declarations, environmental impact assessments, etc. Accuracy of Results: EPDs regularly rely on estimations of impacts, and the level of accuracy in estimation of effect differs for any particular product line and reported impact. Comparability: EPDs are not comparative assertions and are either not comparable or have limited comparability when they cover different life cycle stages, are based on different product category rules or are missing relevant environmental impacts. EPDs from different programs may not be comparable.

EPD PROGRAM AND PROGRAM OPERATOR NAME, ADDRESS, LOGO, AND WEBSITE	ASTM International, 100 barr harbor drive west conshohocken, PA 19428
GENERAL PROGRAM INSTRUCTIONS AND VERSION NUMBER	General Program Instructions. Version 8.0. April 29, 2020
MANUFACTURER NAME AND ADDRESS	CommScope, Inc. 3642 E US Highway 70, Claremont, North Carolina 28610
DECLARATION NUMBER	EPD 1210
DECLARED PRODUCT & FUNCTIONAL UNIT OR DECLARED UNIT	CommScope TENIO- Splice/Patch Trays Functional Unit = One piece of Splice or Patch Tray for a reference lifetime of 25 years
REFERENCE PCR AND VERSION NUMBER	PEP ecopassport Program: Part A PCR for Electrical, Electronic and HVAC-R Products and Part B PSR Specific Rules for Wire Cables and Accessories
DESCRIPTION OF PRODUCT APPLICATION/USE	Part of CommScope's advanced TENIO fiber management system, designed to support efficient fiber splicing and patching, secure splice protection, easy installation, and flexible configuration.
PRODUCT RSL DESCRIPTION (IF APPL.)	25 Years
MARKETS OF APPLICABILITY	Europe
DATE OF ISSUE	15 June 2026
PERIOD OF VALIDITY	5 Years
EPD TYPE	Product Specific
RANGE OF DATASET VARIABILITY	N/A
EPD SCOPE	Cradle-to-Grave
YEAR(S) OF REPORTED PRIMARY DATA	2025
LCA SOFTWARE DATABASE(S) & VERSION NUMBER	SimaPro 10.2.0.0 & ecoinvent 3.11
LCIA METHODOLOGY & VERSION NUMBER	CML- IA Baseline 3.11, TRACI 2.2 and EN15804+A2 (adapted) 1.03
The sub-category PCR review was conducted by:	
This declaration was independently verified in accordance with ISO 14025: 2006. The "PEP ecopassport Program PCR for electrical, electronic and HVAC-R products", v4.0, 2021 based on EN 15804:2012 + A2:2019, serves as the core PCR. ☐ INTERNAL ☒ EXTERNAL	Timothy S Brooke ASTM International
This life cycle assessment was conducted in accordance with ISO 14044 and the reference PCR by:	
This life cycle assessment was independently verified in accordance with ISO 14044 and reference PCR by:	Thomas P. Gloria, Ph. D. Industrial Ecology Consultants

Environmental declarations from different programs (ISO 14025) may not be comparable. Comparison of the environmental performance using EPD information shall consider all relevant information modules over the full life cycle of the products within the building. This PCR allows EPD comparability only when the same functional requirements between products are ensured and the requirements of EN 15804:2012+A2:2019 are met. It should be noted that different LCA software and background LCI datasets may lead to differences results for upstream or downstream of the life cycle stages declared.

General Information

Description of Company/Organization

CommScope (NASDAQ: COMM) helps design, build and manage wired and wireless networks around the world. Corporate responsibility and sustainability drive us to make decisions that benefit people, society, the planet and our bottom line. We enable faster, smarter and more sustainable solutions while respecting human and natural resources. Innovative technology, intelligent engineering and energy-efficient design help us meet our goals. CommScope builds sustainable networks that make our customers more agile, simultaneously helping to preserve the natural ecosystems from which we source components and materials.

Product Description


The TENIO splice/patch trays are internal fiber management components used in TENIO single-ended fiber optic closures for organizing, protecting, and managing optical fibers during splicing and optional patching operations. The trays provide controlled fiber routing and secure splice protection while maintaining accessibility for installation, maintenance, and network upgrades.

Product Type: Fiber splice/patch tray for single-ended fiber optic closures

Product Characteristics:

- Modular fiber management trays for splicing and optional patching/monitoring
- Supports organized fiber routing and controlled bend radius
- Available in splice and patch tray configurations with different fiber capacities
- Compatible with multiple fiber types and cable constructions
- Stackable and modular design to adapt to varying network densities
- Enables easy access for installation, re-entry, and maintenance activities
- Intended for use in distribution and access network environments within TENIO closures

This EPD covers the following TENIO-Tray product variants:

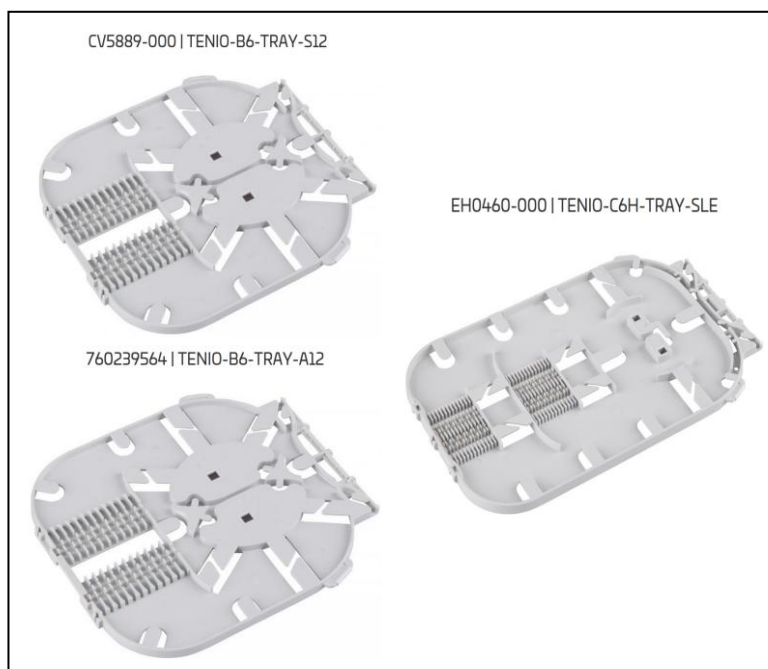


TENIO- Splice Trays



TENIO- Patch Trays

Flow Diagram

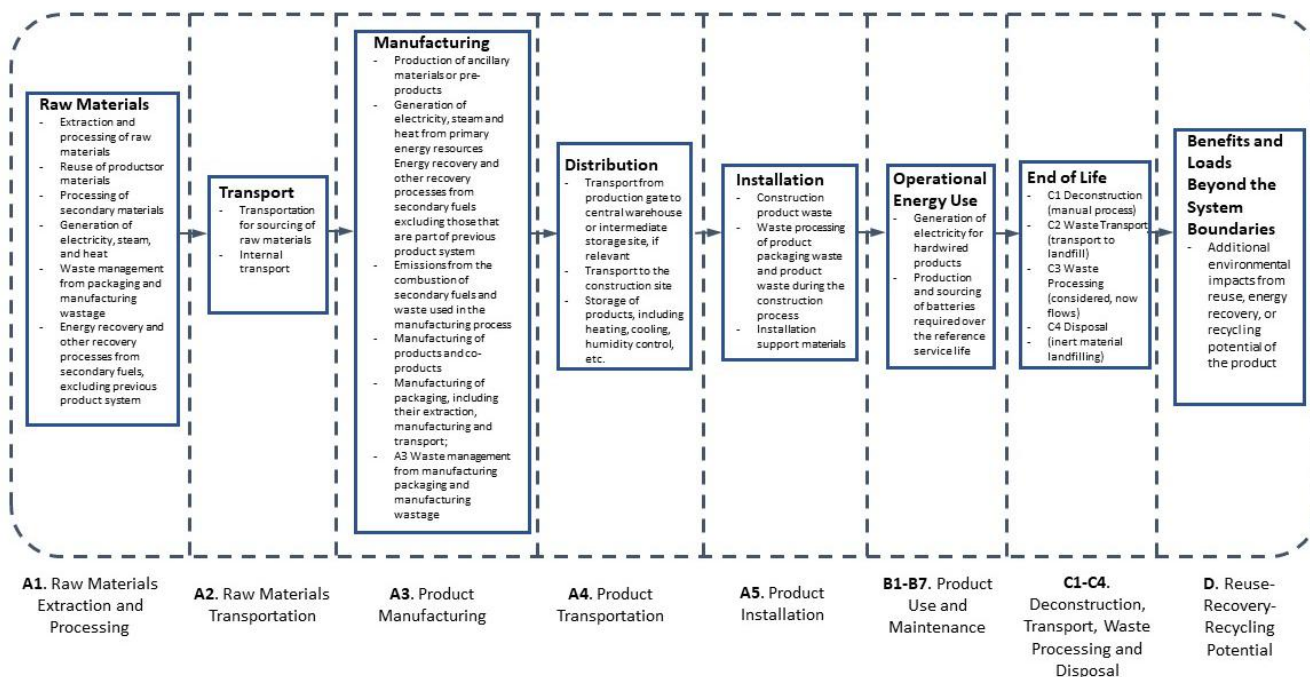

Manufacturer Specific EPD

This product-specific EPD was developed based on the cradle-to-grave (modules A1-D) Life Cycle Assessment. The EPD accounts for raw material extraction and processing, transport, product manufacturing, distribution, installation, disposal. An impact assessment was completed for each Tray product type and the product type with the highest impact is reported. Other product types are represented through the scaling factor table and can be independently calculated.

Application

The TENIO trays are designed as modular fiber management elements within TENIO closures, providing structured fiber routing, secure splice protection, and optional patching functionality while ensuring easy installation, re-entry, and reliable fiber organization for feeder, distribution, and access network applications.

Material Composition

The primary product and packaging materials are shown below as mass percentages, representing the composition of the product in its delivered state. The material composition of each TENIO Tray type is as follows:

Raw materials weight (g)	TENIO-B6-TRAY-S12	TENIO-B6-TRAY-A12	TENIO-C6H-TRAY-SLE	TENIO-B6-TRAY-PATCH	TENIO-C6-TRAY-PATCH
PC+ABS	88%	87%	88%	66%	69%
Cardboard	7%	8%	7%	20%	18%
PE-LD bag	2%	2%	1%	3%	3%
Wooden pallet	4%	4%	4%	11%	10%


Technical Details

For the declared product of TENIO Trays, the following technical data in the delivery status must be provided with reference to the test standard:

Technical Data	
General Specifications	
Product Type	Fiber splice/patch tray
Product Series	TENIO
Application	For use with TENIO closures (TENIO-B6 & TENIO-C6H)
Splice Tray Function	For fiber splicing
Patch Tray Function	For test/monitoring applications
Splice Tray Types	S12 (SMOUV 45mm), A12 (ANT) and SLE (SMOUV 45mm)
Patch Tray Types	B6 (2 SC duplex) and C6H (4 SC duplex)
Packaging- quantity	Splice Trays- 12 per Package/ 180 per box/ 8640 per pallet
Packaging- quantity	Patch Trays- 3 per Package/ 60 per box/ 2880 per pallet
Fiber capacity	12 or 24 fiber splices per tray
Color	Gray
Mounting	Snap-in, stackable tray design within closure tray towers
Network Area Type	Distribution and access network environments
Product weights	Minimum- 0.024 kg & Maximum- 0.055 kg
Environmental Specifications	
Environmental Space	underground, ground-level, and aerial installations
Operating Temperature	–40 °C to +70 °C
Sealing compliance	40 kPa and 5m waterhead compliant with prEN50411
Regulatory Compliance	
Quality Management	ISO 9001:2015
Compliance	RoHS compliant, REACH-SVHC compliant

Properties of Declared Product as Shipped

TENIO splice and patch trays are supplied as separate modular units intended for integration within TENIO closures. The trays are delivered as individual components and are ordered separately to populate unloaded or partially populated closures, or to retrofit existing TENIO-B6 and TENIO-C6H closures. Splice tray variants are available for different splice capacities and splice protector types, while patch tray variants provide test and monitoring points and require compatible adapters to be ordered separately. Multiple tray types can be combined within a single closure depending on the required fiber count, splicing density, and network configuration.

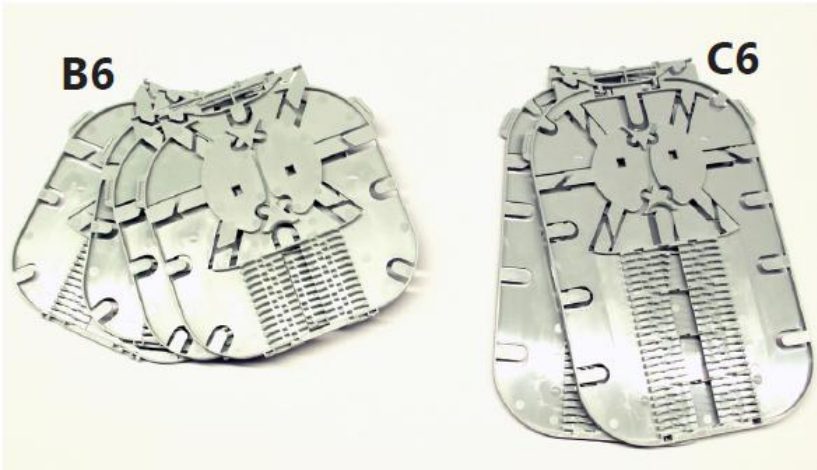

Methodological Framework

Functional Unit

The declaration refers to the functional unit of one piece of Tray and the reference product (maximum weight/Impact) is TENIO-C6-TRAY-PATCH.

	Name	Value	Unit
	Functional Unit	1	piece
TENIO-C6-TRAY-PATCH	Maximum Mass	0.055	kg

System Boundary

This is a cradle to grave Environmental Product Declaration. The following life cycle phases were considered:

Life Cycle Stage	Life Cycle Module	Module	X = Included/ Not Included
Product Stage	Raw Material Supply & Parts manufacturing	A1	X
	Transport	A2	X
	Assembly process	A3	X
Construction Process Stage	Transport from gate to the site	A4	X
	Installation process	A5	X

Use Stage	Use	B1	X
	Maintenance	B2	X
	Repair	B3	X
	Replacement	B4	X
	Refurbishment	B5	X
	Operational energy use	B6	X
	Operational water use	B7	X
End of Life Stage	Deconstruction/ demolition	C1	X
	Transport	C2	X
	Waste processing	C3	X
	Disposal	C4	X
Benefits and Loads Beyond the System Boundaries	Reuse-Recovery-Recycling potential	D	X

Notes:

- There are no activities in the Modules B1-B7 and C1 as the values are “0”
- Module D is reported but excluded from the total life cycle results as it falls outside the system boundary

Reference Service Life

The reference service life of the Trays along with Closure is 25 years.

Allocation

Allocation was determined on a per piece basis for the system.

Cut-off Criteria

Processes whose total contribution to the final result, with respect to their mass and in relation to all considered impact categories, is less than 1% can be neglected. The sum of the neglected processes may not exceed 5% by mass of the considered impact categories. For this, a documented assumption is permissible.

For Hazardous Substances the following requirements apply:

- The Life Cycle Inventory (LCI) of hazardous substances will be included, if the inventory is available.
- If the LCI for a hazardous substance is not available, the substance will appear as an input in the LCI of the product, if its mass represents more than 0.1% of the product composition.
- If the LCI of a hazardous substance is approximated by modeling another substance, documentation will be provided.

This EPD is in compliance with the cut-off criteria. No processes were neglected or excluded. Capital items for the production processes (machine, buildings, etc.) were not taken into consideration.

Data Sources

Primary data were collected for every process in the product system under the control of CommScope. Secondary data from the ecoinvent 3.11 database were utilized when necessary. These data were evaluated and have temporal, geographic, and technical coverage appropriate to the scope of the product category.

Data Quality

The data sources used are complete and representative of global systems in terms of the geographic and technological coverage and are a recent vintage (i.e. less than ten years old). Primary data are based on direct information from manufacturers. Secondary data sets were used for raw materials extraction and processing, end of life, transportation, and energy production flows. Wherever secondary data is used, the study adopts critically reviewed data for consistency, precision, and reproducibility to limit uncertainty.

Period Under Review

The period under review is the full calendar year of 2025.

Treatment of Biogenic Carbon

The uptake and release of biogenic carbon throughout the product life cycle follows EN15804+A2 Section 6.4.4.

Comparability and Benchmarking

A comparison or an evaluation of EPD data is only possible if all data sets to be compared were created according to EN 15804 + A2 and the building context, respectively the product-specific characteristics of performance, are taken into account. Environmental declarations from different programs may not be comparable. Full conformance with the PCR allows for EPD comparability only when all stages a product's life cycle have been considered. However, variations and deviations are possible.

Units

The LCA results within this EPD are reported in SI units.


Additional Environmental Information

Background Data

For life cycle modeling of the considered products, SimaPro- LCA software tool, developed by PRé-Sustainability, is used. The ecoinvent database contains consistent and documented datasets which are available online. To ensure comparability of results in the LCA, data from the ecoinvent database were used for materials, energy, transportation, and waste treatment.

Manufacturing

The TENIO splice and patch trays are injection-molded plastic components manufactured by CommScope approved contract manufacturers using thermoplastic raw materials PC and ABS. After molding and basic quality inspection, the trays are packed in bulk and transported to CommScope’s assembly facility in Brno, Czech Republic. At the Brno site, the trays are stored as modular inventory and repackaged according to customer order requirements, either as standalone tray units or bundled together with TENIO fiber closures. Finished products are then shipped through CommScope’s distribution network to customers for deployment in feeder, distribution, and access network applications.

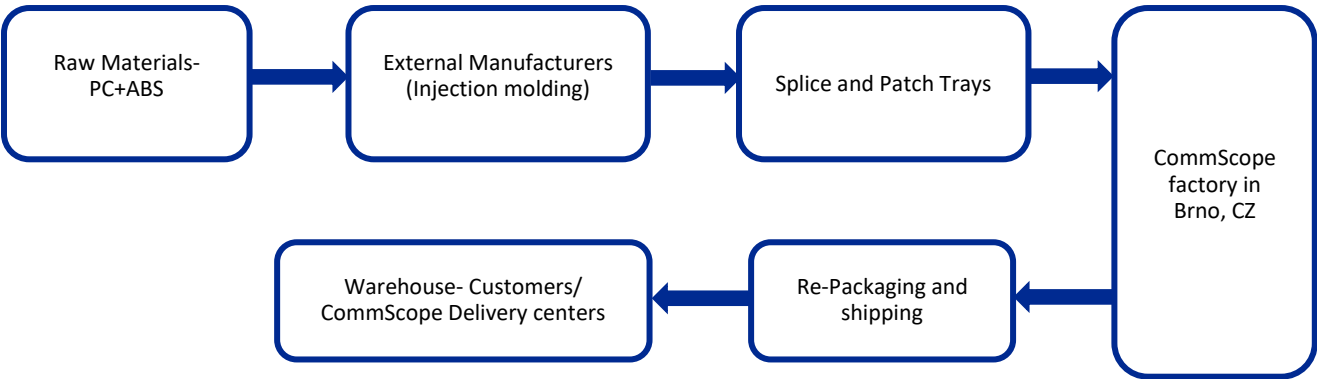

Transformation

Transport to Installation Site (A4)		
Description	Value	Unit
Transport type	Truck/ lorry > 32 metric ton	
Fuel type/ Liters of Fuel	Diesel, compliant with EURO5	
Liters of Fuel	35	l/100 km
Transport Distance (PCR assumption)	3500	km
Capacity Utilization	85	%

Product Installation

CommScope TENIO closures and Trays are distributed and installed by trained technicians in accordance with applicable local and national standards. Installation involves only the management of packaging waste, as there is no energy consumption, material loss, or use of auxiliary materials during the process. The product is designed for complete manual installation without the need for power tools, resulting in negligible electricity use and no installation scrap.

Installation into the building (A5)		
Name	Max	Unit
Auxiliary materials	-	kg
Water consumption	-	m ³
Other resources	-	kg
Electricity consumption	-	kWh
Other energy carriers	-	MJ
Product loss per functional unit	0.00E+00	kg
Waste materials at construction site	0.00E+00	kg
Output substance (recycle)	0.00E+00	kg
Output substance (landfill)	0.00E+00	kg
Output substance (incineration)	0.00E+00	kg
Packaging waste (recycle)	8.14E-03	kg
Packaging waste (landfill)	3.68E-03	kg
Packaging waste (incineration)	5.51E-03	kg
Direct emissions to ambient air*, soil, and water	0.00E+00	kg CO ₂
VOC emissions	-	kg

*CO₂ emissions to air from disposal of packaging

Reference Service Life		
Name	Value	Unit
Reference Service Life	25	years
Declared product properties (at the gate) and finishes, etc.	-	
Design application parameters (if instructed by the manufacturer), including the references to the appropriate practices and application codes	-	
An assumed quality of work, when installed in accordance with the manufacturer's instructions	-	
Outdoor environment, (for outdoor applications), e.g. weathering, pollutants, UV and wind exposure, building orientation, shading, temperature	-	
Indoor environment (for indoor applications), e.g. temperature, moisture, chemical exposure	-	
Usage conditions, e.g. frequency of use, mechanical exposure	-	
Maintenance e.g. required frequency, type and quality and replacement of components	-	

Product Use

No cleaning, maintenance, repair, replacement or refurbishment is required. There is no operational energy or water use.

Operational Energy Use (B6)		
Name	Value	Unit
Ancillary materials specified by material	-	kg
Net freshwater consumption	-	m ³
Electricity consumption	-	kWh
Power output of equipment	-	kWh

Disposal

The product can be manually disassembled to separate different individual parts or materials for disposal. Most of the parts are disposed through waste incineration with energy recovery or landfilled, in accordance with the PCR.

End of Life (C2-C4)		
Name	Max	Unit
Collected separately	0.00E+00	kg
Collected as mixed waste	3.80E-02	kg
Reuse	0.00E+00	kg
Recycling	0.00E+00	kg
Landfilling	1.90E-02	kg
Incineration with energy recovery	1.90E-02	kg
Energy conversion- Electricity	20	%
Energy conversion- Heat	50	%

Re-use Phase

Re-use of the product is not common. However, energy in the form of heat and electricity has been recovered from the waste processing of packaging materials at the Installation stage (A5) and waste processing of product materials at the end-of-life disposal stage (C2-C4). Energy recovery for the incineration of polymer materials were calculated according to Appendix D of the Part A PCR.

Energy recovery Potential (D)		
Name	Max	Unit
Net energy benefit of energy recovery from packaging wastes incineration (A5-Installation) in the form of heat	4.22E-02	MJ
Net energy benefit of energy recovery from packaging wastes incineration (A5-Installation) in the form of electricity	1.69E-02	MJ
Net energy benefit of energy recovery from product wastes incineration (C2-C4 End of life Disposal) in the form of heat	2.38E-01	MJ
Net energy benefit of energy recovery from product wastes incineration (C2-C4 End of life Disposal) in the form of electricity	9.50E-02	MJ
Total Net energy benefits of energy recovery in the form of heat	2.80E-01	MJ
Total Net energy benefits of energy recovery in the form of electricity	1.12E-01	MJ

LCA Results - Maximum Impact for the Product "TENIO-C6-TRAY-PATCH"

Results shown below were calculated using the CML-IA baseline V3.11 / EU25 methodology

CML-IA baseline- Impact Assessment									
Impact category	Unit	Total	A1-A3	A4	A5	C2	C3	C4	D
Abiotic depletion	kg Sb eq	2.34E-06	2.26E-06	5.75E-08	5.04E-09	1.13E-08	2.19E-09	3.81E-10	-2.23E-08
Abiotic depletion (fossil fuels)	MJ	5.26E+00	4.87E+00	2.94E-01	2.57E-02	5.76E-02	8.27E-03	4.31E-03	-1.21E-01
Global warming (GWP100a)	kg CO2 eq	3.43E-01	2.70E-01	2.03E-02	1.78E-03	3.98E-03	4.52E-02	1.66E-03	-1.04E-02
Ozone layer depletion (ODP)	kg CFC-11 eq	8.73E-09	8.26E-09	3.57E-10	3.13E-11	6.99E-11	1.30E-11	4.61E-12	-1.42E-10
Photochemical oxidation	kg C2H4 eq	1.02E-04	9.71E-05	3.12E-06	2.74E-07	6.12E-07	1.57E-07	2.94E-07	-1.95E-06
Acidification	kg SO2 eq	9.79E-04	9.05E-04	5.14E-05	4.50E-06	1.01E-05	7.32E-06	9.50E-07	-4.37E-05
Eutrophication	kg PO4--- eq	7.24E-04	3.96E-04	1.40E-05	1.23E-06	2.75E-06	5.49E-06	3.04E-04	-3.41E-05

*Stages B1 through B7 and C1 have not been considered and reported as they are not applicable in this LCA study

Results shown below were calculated using TRACI 2.2 V1.00/ US-Canadian 2008 Methodology

TRACI 2.2- Impact Assessment									
Impact category	Unit	Total	A1-A3	A4	A5	C2	C3	C4	D
Ozone depletion	kg CFC-11 eq	1.08E-08	1.02E-08	4.72E-10	4.13E-11	9.24E-11	1.49E-11	6.08E-12	-1.81E-10
Global warming	kg CO2 eq	3.39E-01	2.66E-01	2.02E-02	1.77E-03	3.95E-03	4.52E-02	1.54E-03	-1.03E-02
Smog	kg O3 eq	1.60E-02	1.39E-02	1.44E-03	1.26E-04	2.82E-04	2.87E-04	3.40E-05	-4.27E-04
Acidification	kg SO2 eq	1.03E-03	9.44E-04	6.00E-05	5.25E-06	1.17E-05	9.64E-06	1.30E-06	-4.22E-05
Freshwater eutrophication	kg P eq	8.85E-05	4.59E-05	8.41E-07	7.37E-08	1.65E-07	4.14E-07	4.11E-05	-4.46E-06
Marine eutrophication	kg N eq	1.46E-04	1.07E-04	1.23E-05	1.08E-06	2.41E-06	2.67E-06	2.01E-05	-4.20E-06

*Stages B1 through B7 and C1 have not been considered and reported as they are not applicable in this LCA study

Results shown below were calculated using EN 15804 + A2 (adapted) V1.03 Methodology.

EN 15804+A2 (adapted)- Impact Assessment									
Impact category	Unit	Total	A1-A3	A4	A5	C2	C3	C4	D
Acidification	mol H+ eq	1.19E-03	1.09E-03	6.77E-05	5.93E-06	1.33E-05	1.03E-05	1.31E-06	-5.15E-05
Climate change	kg CO2 eq	4.34E-01	3.61E-01	2.05E-02	1.79E-03	4.01E-03	4.52E-02	1.74E-03	-1.07E-02
Climate change - Biogenic	kg CO2 eq	3.19E-05	9.37E-02	1.25E-05	1.10E-06	2.45E-06	-9.37E-02	1.85E-06	0.00E+00
Climate change - Fossil	kg CO2 eq	3.40E-01	2.67E-01	2.05E-02	1.79E-03	4.01E-03	4.52E-02	1.74E-03	-1.04E-02
Climate change - Land use and LU change	kg CO2 eq	2.86E-04	2.76E-04	7.35E-06	6.44E-07	1.44E-06	3.52E-07	4.29E-08	-3.09E-05
Ecotoxicity, freshwater	CTUe	4.88E+00	4.74E+00	3.51E-02	3.07E-03	6.87E-03	8.89E-02	5.19E-03	-2.29E-02
Ecotoxicity, freshwater - inorganics	CTUe	3.95E+00	3.81E+00	3.37E-02	2.95E-03	6.60E-03	8.88E-02	5.16E-03	-2.27E-02
Ecotoxicity, freshwater - organics	CTUe	9.33E-01	9.31E-01	1.40E-03	1.22E-04	2.73E-04	7.95E-05	3.04E-05	-2.21E-04
Particulate matter	Disease.	1.25E-08	9.80E-09	2.07E-09	1.81E-10	4.06E-10	5.42E-11	3.08E-11	-1.77E-10
Eutrophication, marine	kg N eq	2.78E-04	2.03E-04	2.30E-05	2.01E-06	4.50E-06	5.87E-06	3.97E-05	-9.09E-06
Eutrophication, freshwater	kg P eq	8.15E-05	7.95E-05	1.44E-06	1.27E-07	2.83E-07	1.49E-07	1.46E-08	-9.55E-06
Eutrophication, terrestrial	mol N eq	2.46E-03	2.08E-03	2.50E-04	2.19E-05	4.90E-05	5.00E-05	5.81E-06	-7.79E-05
Human toxicity, cancer	CTUh	2.10E-10	2.02E-10	3.34E-12	2.93E-13	6.55E-13	3.85E-12	6.91E-14	-1.51E-12
Human toxicity, cancer - inorganics	CTUh	3.33E-11	2.80E-11	1.44E-12	1.26E-13	2.81E-13	3.39E-12	4.74E-14	-8.98E-13
Human toxicity, cancer - organics	CTUh	1.77E-10	1.74E-10	1.91E-12	1.67E-13	3.73E-13	4.65E-13	2.17E-14	-6.11E-13
Human toxicity, non-cancer	CTUh	2.75E-09	2.35E-09	1.93E-10	1.69E-11	3.77E-11	1.35E-10	1.03E-11	-7.14E-11
Human toxicity, non-cancer - inorganics	CTUh	2.53E-09	2.15E-09	1.81E-10	1.58E-11	3.54E-11	1.35E-10	8.32E-12	-6.91E-11
Human toxicity, non-cancer - organics	CTUh	2.19E-10	2.02E-10	1.19E-11	1.05E-12	2.34E-12	2.51E-13	2.02E-12	-2.31E-12
Ionising radiation	kBq U-235 eq	2.89E-02	2.84E-02	3.35E-04	2.94E-05	6.57E-05	1.45E-05	8.27E-06	-6.77E-03
Land use	Pt	3.73E+00	3.33E+00	3.01E-01	2.64E-02	5.90E-02	2.44E-03	1.08E-02	-3.40E-02
Ozone depletion	kg CFC11 eq	1.01E-08	9.55E-09	4.48E-10	3.92E-11	8.77E-11	1.43E-11	5.77E-12	-1.73E-10
Photochemical ozone formation	kg NMVOC eq	1.17E-03	1.02E-03	1.07E-04	9.40E-06	2.10E-05	1.26E-05	2.49E-06	-2.50E-05
Resource use, fossils	MJ	5.78E+00	5.38E+00	2.99E-01	2.62E-02	5.86E-02	8.50E-03	4.44E-03	-2.41E-01
Resource use, minerals and metals	kg Sb eq	2.33E-06	2.26E-06	5.75E-08	5.04E-09	1.13E-08	2.19E-09	3.80E-10	-2.20E-08
Water use	m3 depriv.	9.01E-02	8.70E-02	1.36E-03	1.19E-04	2.67E-04	1.46E-03	-9.98E-05	-2.27E-03

*Stages B1 through B7 and C1 have not been considered and reported as they are not applicable in this LCA study

Environmental Product Declaration (EPD)

CommScope® Product
TENIO™- Splice/Patch Trays



According to
ISO 14025,
EN 15804 + A2

The results below contain the resource use throughout the life cycle of the product.

Parameters		Unit	Total	A1-A3	A4	A5	C2	C3	C4
PERE	Use of renewable primary energy excluding renewable primary energy resources used as raw materials	MJ	1.13E+00	1.12E+00	4.62E-03	4.05E-04	9.05E-04	3.49E-04	1.33E-04
PERM	Use of renewable primary energy resources used as raw materials	MJ	2.47E-01	2.47E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERT	Total use of renewable primary energy resources	MJ	1.38E+00	1.37E+00	4.62E-03	4.05E-04	9.05E-04	3.49E-04	1.33E-04
PENRE	Use of non-renewable primary energy excluding renewable primary energy resources used as raw materials	MJ	6.20E+00	5.78E+00	3.18E-01	2.79E-02	6.23E-02	9.23E-03	4.72E-03
PENRM	Use of non-renewable primary energy resources used as raw materials	MJ	1.37E+00	1.37E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	Total use of non-renewable primary energy resources	MJ	7.57E+00	7.14E+00	3.18E-01	2.79E-02	6.23E-02	9.23E-03	4.72E-03
SM	Use of secondary material	kg	1.11E-02	1.11E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	Use of renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	Use of non-renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	Net use of fresh water	m ³	8.86E-02	8.54E-02	1.36E-03	1.19E-04	2.67E-04	1.45E-03	-6.80E-05

*Stages B1 through B7 and C1 have not been considered and reported as they are not applicable in this LCA study

Environmental Product Declaration (EPD)

CommScope® Product
TENIO™- Splice/Patch Trays



According to
ISO 14025,
EN 15804 + A2


The results below contain the waste and output flows throughout the life cycle of the product.

Parameters		Units	Total	A1-A3	A4	A5	C2	C3	C4
HWD	Hazardous waste disposed	kg	6.86E-04	2.87E-04	8.54E-06	7.48E-07	1.67E-06	3.88E-04	3.84E-07
NHWD	Non-hazardous waste disposed	kg	7.44E-02	2.18E-02	2.58E-02	2.26E-03	5.05E-03	4.83E-04	1.90E-02
RWD	Radioactive waste disposed	kg	7.43E-06	7.32E-06	8.24E-08	7.22E-09	1.61E-08	3.67E-09	1.89E-09
CRU	Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MFR	Materials for recycling	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MER	Materials for energy recovery	kg	1.90E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.90E-02	0.00E+00
EE	Exported energy	MJ	3.92E-01	0.00E+00	0.00E+00	5.90E-02	0.00E+00	3.33E-01	0.00E+00

*Stages B1 through B7 and C1 have not been considered and reported as they are not applicable in this LCA study

LCA Interpretation - Maximum Impact for the Tray Product “TENIO-C6-TRAY-PATCH”

The below LCA results based on CML method indicates that the manufacturing stage (A1–A3) is the dominant contributor across most impact categories, including abiotic depletion, ozone layer depletion, photochemical oxidation, and acidification, where it typically accounts for more than 90% of the total impacts, reflecting the influence of polymer raw material production and injection-molding processes. Transport to site (A4) contributes a comparatively small share, while installation is negligible. For global warming potential (GWP100a), the production stage remains the primary driver, although end-of-life processes (C3–C4) show a noticeable contribution, indicating sensitivity to plastic waste treatment assumptions. In the eutrophication category, end-of-life disposal (C4) represents a significant share of total impacts, identifying waste treatment as a secondary hotspot alongside material production. Overall, the main environmental hotspots are polymer raw material production, energy use during injection molding, and end-of-life disposal of plastic components; potential improvement measures therefore include material weight reduction, increased use of recycled or lower-impact polymers, improved energy efficiency in manufacturing, and enhanced end-of-life scenarios favoring recycling over disposal.

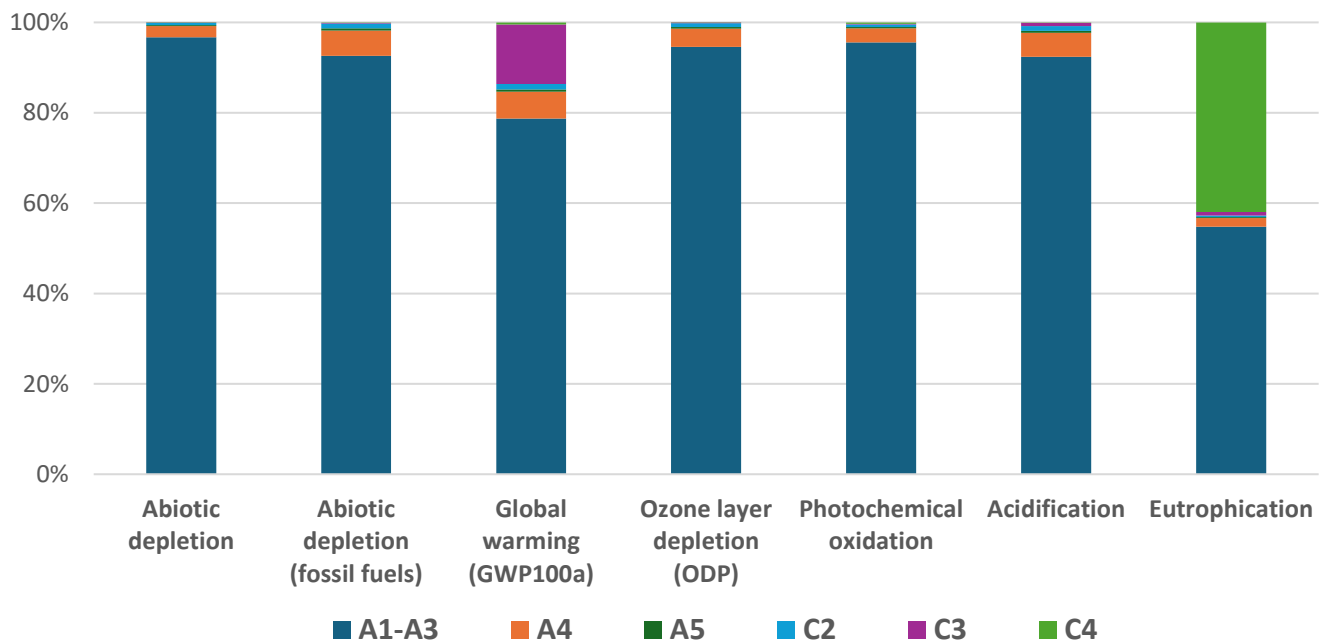

Scaling Factor Table

For EPDs with product groups, an impact assessment was completed for each product, and the highest impacts were reported as representations of the product group. The rest of the products in the group are represented through scaling factor tables and can be independently calculated for the results based on CML method.

The table below presents the scaling factors for the TENIO-Splice and Patch Trays product group. To determine the impact results for these products, multiply the respective scaling factors by the LCA results provided in the Maximum Impact section. This approach ensures consistent and transparent calculation of environmental impacts across all products in the group.

	TENIO-C6- TRAY-PATCH	TENIO-B6- TRAY-S12	TENIO-B6- TRAY-A12	TENIO-C6H- TRAY-SLE	TENIO-B6- TRAY-PATCH
Impact category	Scaling factor values				
Abiotic depletion	1	0.643	0.618	0.856	0.896
Abiotic depletion (fossil fuels)	1	0.578	0.547	0.816	0.883
Global warming (GWP100a)	1	0.597	0.571	0.822	0.885
Ozone layer depletion (ODP)	1	0.606	0.578	0.834	0.889
Photochemical oxidation	1	0.697	0.676	0.863	0.919
Acidification	1	0.637	0.611	0.836	0.902
Eutrophication	1	0.590	0.575	0.823	0.875

Additional Environmental Information

Environmental and Health During Manufacturing

CommScope values employees' health, safety and well-being. To this end, we maintain a robust company-wide environment, health and safety (EHS) management system. This is an integrated program based on the requirements of the International Standards of ISO45001 and ISO14001. To support this integrated EHS management system, CommScope utilizes a web-based platform, the BSI Entropy™ tool. This tool supports the management of our EHS processes and operations at the corporate and facility level. All EHS management system records (policies, procedures, method statements, health and safety risk assessments, environmental aspect/impact assessments, legal requirements, permits, training, internal and external audits, incidents and implemented CAPA, KPIs, and other records related to EHS) are maintained and managed in Entropy. In addition, 90% of CommScope manufacturing facilities are certified according to the ISO14001 and ISO45001 standards. Our vision and commitments are detailed in our [EHS Policy](#).

CommScope understands the need to address the environmental impacts of its products and services. CommScope engages product development teams in designing innovative and more sustainable solutions across a product's life cycle—from design and manufacturing to product use and end of life.

CommScope is committed to demonstrating a high standard of global product compliance practices. Through this commitment, we actively monitor global environmental trends and emerging regulatory requirements that may affect our products, operations, supply chain, and customer base. We are committed to be compliant with all applicable environmental product related legal and other requirements. To achieve this, we have a global organization comprising environmental specialists, engineers, and product compliance experts who are constantly ensuring our compliance status is maintained. We manage our compliance using a cross-functional approach with our engineers, designers, quality organization, supply chain organization, and production.

CommScope is committed to upholding the human rights of its employees. To ensure our employees are treated with dignity and respect, we follow a well-established Code of Ethics and Business Conduct and Labor Policy that align with recognized standards and guidelines from the International Labor Organization, the United Nations Global Compact, the UN Universal Declaration of Human Rights, SA8000 and applicable laws.

Environmental and Health During Installation

There is no harmful emissive potential. No damage to health or impairment is expected under normal use corresponding to the intended use of the product.

Extraordinary Effects

Fire

No extraordinary effects to the environment can be anticipated during exposure to fire.

Water

Contains no substances that have any impact on water in case of flood.

Mechanical Destruction

No danger to the environment can be anticipated during mechanical destruction.

Delayed Emissions

Global warming potential is calculated using the CML- IA Baseline 3.11, TRACI 2.2 and EN15804+A2 (adapted) 1.03 impact assessment methodologies. Delayed emissions are not considered.

Environmental Activities and Certifications

Our Sustainability Report details CommScope's efforts to operate the business ethically and with integrity; protect the environment; maintain the health, safety and well-being of our workforce; and support the communities in which we operate. To learn more, view our comprehensive Sustainability Report at <https://www.commscope.com/corporate-responsibility-and-sustainability/>.

CommScope maintains a variety of certifications based on the widely accepted industry standards:

- Quality Management System certification (ISO9001/TL9000)
- Environmental Management System certification (ISO14001)
- Health and Safety Management System certification (ISO45001)

These certificates can be downloaded from our company website:

<https://www.commscope.com/corporate-responsibility-and-sustainability/philosophy/#certifications>

Product sustainability certifications including EPDs and Health Product Declarations (HPDs) can be downloaded from our company website:

<https://www.commscope.com/corporate-responsibility-and-sustainability/product-sustainability/certifications/>

Further Information

Commscope Connectivity Belgium BV
Diestsesteenweg 692, 3010 Kessel-Lo
Belgium
ProductSustainability@commscope.com

References

- PCR PEP ecopassport Program: Product Category Rules for Electrical, Electronic and HVAC-R Products, v4.0, 2021.
- PSR PEP ecopassport Program Product Specific Rules specific for Wires, Cables and Accessories, v4.0, 2022
- LCA tool & Databases Simapro Craft version 10.2.0.0 of LCA software & ecoinvent 3.11, Industry data 2.0 databases.
- ISO 14025 ISO 14025:2011-10, Environmental labels and declarations — Type III environmental declarations — Principles and procedures.
- ISO 14040 ISO 14040:2009-11, Environmental management — Life cycle assessment — Principles and framework.
- ISO 14044 ISO 14044:2006-10, Environmental management — Life cycle assessment — Requirements and guidelines.
- EN 15804 + A2 EN 15804:2012+A2:2019/AC:2021 - Sustainability of construction works - Environmental Product Declarations - Core rules for the product category of construction products
- ASTM 2020 ASTM International General Program Instructions v8.0, April 29, 2020
- Characterization Method IPCC. 2021. Climate Change 2021. The Physical Science Basis. Contribution of Working Group I to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change [Masson, delmotte, V., et al] Cambridge University Press, Cambridge, UK and New York, NY, USA (<http://www.ipcc.ch/report/ar6/wg1/>).
- Characterization Method Hauschild M.Z., & Wenzel H. Environmental Assessment of Products. Springer, US, Vol. 2, 1998.
- Characterization Method Heijungs R., Guinée J.B., Huppes G., Lankreijer R.M., Udo de Haes H.A., Wegener Sleswijk A. Environmental Life Cycle Assessment of Products: Guide and Backgrounds. CML. Leiden University, Leiden.
- Characterization Method Jenkin M.E., & Hayman G.D. Photochemical ozone creation potentials for oxygenated volatile organic compounds: sensitivity to variations in kinetic and mechanistic parameters. Atmospheric Environment. 1999, 33 (8) pp. 1275-1293.
- Characterization Method WMO. 1999. Scientific Assessment of Ozone Depletion: 1998, World Meteorological Organization Global Ozone Research and Monitoring Project - Report No. 44, WMO, Geneva.
- Characterization Method Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources using Environmental Chambers- version 1.2, January 2017.

Contact Information

Study Commissioner



For more information, visit our website at
<https://www.commscope.com/>

- Contact customer support for product and technical questions at <https://www.commscope.com/contact-us/>
- Contact product compliance at productsustainability@commscope.com
- Contact Corporate Responsibility & Sustainability team for sustainability questions at sustainability@commscope.com

LCA Practitioner

Prabu Pushpanathan
Commscope Connectivity Belgium BV,
Diestsesteenweg 692, 3010 Kessel-Lo,
Belgium
E- mail: ProductSustainability@commscope.com