Fiber Optic Patch Cords




FEATURES

- Designed specifically for ultra high-end performance applications
- · Low insertion loss and high return loss
- All performance data guaranteed over entire operating temperature range (-40° to +85°C)
- Wide selection of standard connector types (including SC/APC, LC/UPC, LC/APC, and MPO/APC) and lengths (up to 30 meters)
- 2 mm, 3 mm, and MPO ribbon jackets to suit application requirements
- Individually packaged with detailed performance data

CommScope fiber optic patch cords are specifically designed for ultra high-end CATV applications. The wide standard selection of connector types, jacket styles, and lengths provide optical connectivity for both indoor and outdoor (VHub and node) installations.

These fiber optic patch cords feature low insertion loss and high return loss, guaranteed over a wide operating temperature range. Each fiber patch cord is individually packaged with detailed recorded performance data

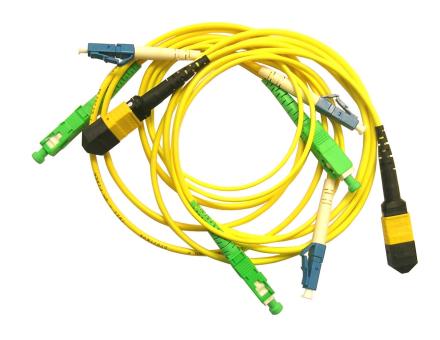

SPECIFICATIONS

Characteristics	Specification	
Environmental		
Operating Temperature Range	-40° to +85°C (-40° to +185°F)	
Storage Temperature Range	-40° to +85°C (-40° to +185°F)	
Cable		
Fiber	SMF-28e and/or SMF-28e+	
Industry Standards	ICEA-640, Telcordia GR-20, listed with RDUP	

ORDERING INFORI	MATION			
SC/APC to SC/APC, 2 mm Jacket		SC/APC to SC/APC, 3	SC/APC to SC/APC, 3 mm Jacket	
Insertion loss, max: 0.3 dB			Insertion loss, max: 0.3 dB	
Return loss, min: 65 dB		Return loss, min: 65 dB		
Model Number	Length (m)	Model Number	Length (m)	
JC1112-0000-2	0.25	JC1111	0.25	
JC1112-000-5	0.50	JC1112	0.50	
JC1112-001-0	1.0	JC1113	1.0	
JC1112-003-0	3.0	JC1114	3.0	
JC1112-010-0	10.0	JC1115	10.0	
JC1112-015-0	15.0	JC1116	30.0	
		JC1117	50.0	
SC/APC to SC/UPC, 3 m	m Jacket	SC/APC to LC/APC, 3	mm Jacket	
Insertion loss, max: 0.35 dE		Insertion loss, max: 0.35	Insertion loss, max: 0.35 dB	
Return loss, min: 55 dB		Return loss, min: 65 dB		
Model Number	Length (m)	Model Number	Length (m)	
JC1131	0.25	JC1151	0.25	
JC1132	0.50	JC1152	0.50	
JC1133	1.0	JC1153	1.0	
JC1134	3.0	JC1154	3.0	
JC1135	10.0	JC1155	10.0	
JC1136	15.0			
SC/APC to LC/UPC, 2 mi	m Jacket	LC/UPC to SC/UPC, 2	mm Jacket	
Insertion loss, max: 0.35 dE	3	Insertion loss, max: 0.4 dB		
Return loss, min: 55 dB		Return loss, min: 55 dB		
Model Number	Length (m)	Model Number	Length (m)	
JC1121	0.25	JC2232	0.5	
JC1122	0.50	JC2234	3.0	
JC1122D	0.50	JC2235	10.0	
JC1123	1.0	JC2236	30.0	
JC1124	3.0			
JC1124D	3.0			
JC1125	10.0			
JC1126	15.0			
LC/APC to LC/APC, 3 mr	n Jacket	LC/UPC to LC/APC, 3	nm Jacket	
Insertion loss, max: 0.4 dB		Insertion loss, max: 0.4 dB		
Return loss, min: 65 dB		Return loss, min: 55 dB		
Model Number	Length (m)	Model Number	Length (m)	
JC1533	1.0	JC1251	0.25	
JC1551	0.25	JC1252	0.50	
JC1552	0.50	JC1253	1.0	
JC1553	1.0	JC1254	3.0	
JC1554	3.0	JC1255	10.0	
JC1555	10.0			
JC1556	30.0			

ORDERING INFORMATION

	•			
LC/UPC to LC/UPC, 2 mm Jacket				
Insertion loss, max: 0.4 dB				
Return loss, min: 55 dB				
Model Number	Length (m)			
JC1221	0.25			
JC1222	0.50			
JC1223	1.0			
JC1224	3.0			
JC1225	10.0			
JC1254D-U	3.0			
MPO (male) to MPO (male) Reflector Type Patch Cord (with ribbon jacket for Use with interlock-protected VHub modules)				
Insertion loss, max: 0.8 dB				
Return loss, min: 60 dB				
Model Number	Length (m)			
JC1443-12	1.0			
JC1443-13	1.0			

RELATED PRODUCTS

NC4000 [®] Optical Node	NH2000 VHub
NC2000 Optical Node	Optical Passives
NH4000 VHub	Installation Services

Contact Customer Care for product information and sales:

United States: 866-36-ARRIS
International: +1-678-473-5656



 $\textbf{Note:} \ \mathsf{Specifications} \ \mathsf{are} \ \mathsf{subject} \ \mathsf{to} \ \mathsf{change} \ \mathsf{without} \ \mathsf{notice}.$

Copyright Statement: © 2023 CommScope, Inc. All rights reserved. ARRIS, the ARRIS logo, and NC4000 are trademarks of CommScope, Inc. and/or its affiliates. All other trademarks are the property of their respective owners. No part of this content may be reproduced in any form or by any means or used to make any derivative work (such as translation, transformation, or adaptation) without written permission from CommScope, Inc and/or its affiliates ("CommScope"). CommScope reserves the right to revise or change this content from time to time without obligation on the part of CommScope to provide notification of such revision or change.

87-10045-RevD_JCxxxx_PatchCords

3 JCxxxx Fiber Optic Patch Cords 01-2023 EA-35123